




The MDI-VN is a very narrow 37.5" wide multi-deck island whose small size, large pack out, and various configurations allow it to be utilized in any number of ways. As a grab-n-go supermarket checkout end cap or as a c-store deli case, the MDI-VN provides great sales per square foot and takes up almost no space. The MDI-VN is suitable for sandwich, salads and deli applications.

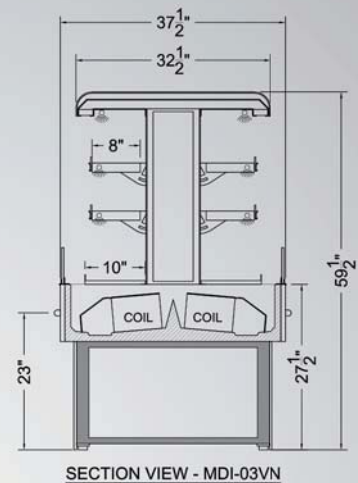

### Standard Features:

#### Architecture:

- All welded rigid frame
- CFC-free foam injected seamless basin
- NSF leveler legs
- Radius end-caps

#### Mechanical:

- High efficiency refrigeration system w/copper tube coils
- Energy efficient fans
- 1 1/2" drains w/traps
- Perimeter air discharge
- Thermometer
- Ready for remote refrigeration system with:
  - Expansion valve - specify refrigerant
  - Temperature sensor - specify
  - Liquid line hand valve

#### Interior:

- Black interior
- Removable base display deck with product stop
- Canopy lighting
- Metal T-5 lighted shelves - consult drawings

#### Exterior:


- Standard color finish
- Tempered glass or acrylic air dam
- Thermoformed ABS canopy

### Options:

- Endpanels:
  - Glass view, shared, or solid end panels
  - Mirror polish or brushed stainless steel end panel interior
- Consult factory on alternative case controls
- Thermostat w/defrost control & suction line solenoid
- Liquid-suction heat exchanger
- Specify for use with secondary coolant systems
- LED lighting - specify location(s)
- Interior stainless steel finish
- Exterior stainless steel, premium color, or laminate finish
- Exterior down light
- Cart bumper - specify size
- Stainless steel, laminate, solid surface, or painted canopy
- Alternative case heights, lengths, & options - consult factory

### Self-Contained Options: (may increase case height)

- Condensing unit
- Electric condensate dissipator
- Digital temperature and defrost controls
- Heavy duty casters

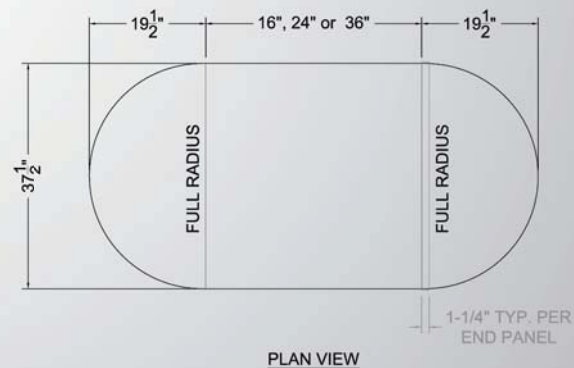

NOTE: Photos may illustrate non-standard options. Southern's display merchandisers are designed for use in stores/environments where temperature and humidity do not exceed 75°F and 55% R.H. We reserve all rights pertaining to any change in product design. Southern's cases, components, and options are certified by one or more of the following: ETL, UL, NSF, CE, and conform to UL Std 471, NSF Std 7, and CAN/CSA C22.2 - CE certified MEA #365-98-E.